


MX522 PCB Spring Type Terminal Block




DIMENSIONS/POSITIONS

MX522-350

間距	Pitch	3.50mm
位數	Poles	2 ~ 24Poles
尺寸a	Dimension a	3.50mm
長度 A	Length	A= 3.50xP+1.50mm(P≥2)
塑膠本體	Housing Material	PA 66
端蓋	Cover	PA 66
端子	Contact	Phosphor Bronze, Tin Plated
電線線徑	Wire Size	14 ~ 20AWG
PCB孔徑	PCB Hole Diameter	1.3mm
環境作業溫度	Operating Temperature	-40°C to +105°C

TECHNICAL DATA

連接符合標準 Connection in acc. with standard EN-VDE		
額定電流 I _N	Nominal Current I _N	2A
額定橫截面	Nominal Cross Section	0.75mm ²
最大負載電流	Maximum load current	2A
絕緣材料	Insulating Material	PA
阻燃等級, 符合UL94 Inflammability class acc. to UL94		V0
額定電壓, UL/CUL Nominal voltage, UL/CUL		300V
額定電流, UL/CUL Nominal current, UL/CUL		6A

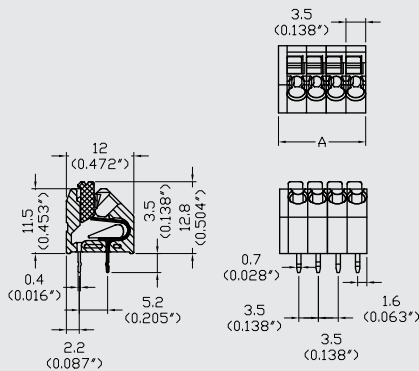

PCB Layout

