


TYPE:MC200-508 Pluggable terminal block

Pitch:5.08mm(0.200inch)



Hooks on the front side

Material

Cage clamp : Brass, Ni plated
Contact : Phosphor bronze, Tin plated, 0.4t
Insulating body : Polyamide66(UL94V-0)
Screw : M2.6, steel, Zinc plated
Color : Green

Environmental

Operation temperature: -55° C to +105° C
Short-time temperature: up to 250° C(+482° F)

Electrical

Current rating : 16Amp AC300V
Insulation withstands volt : AC2000V min
Insulation resistance : >5000M Ω DC500V
Wire strip length : 7mm
Wire range : 14~24 AWG
Screws torque : 4.5 lb-inch

材質


押線夾 : 黃銅鍍鎳
導電夾片 : 磷銅鍍錫, 0.4t
塑膠本體 : Polyamide66(UL94V-0)
螺絲 : M2.6, 鋼鍍鋅
顏色 : 綠色

工作環境

操作溫度 : -55° C to +105° C
瞬間溫度 : +250° C (+482° F)

電氣規格

負載 : 16Amp AC300V
耐電壓 : AC2000V min
絕緣阻抗 : >5000M Ω DC500V
剝線長度 : 7mm
電線線徑 : 14~24 AWG
扭力 : 4.5 lb-inch

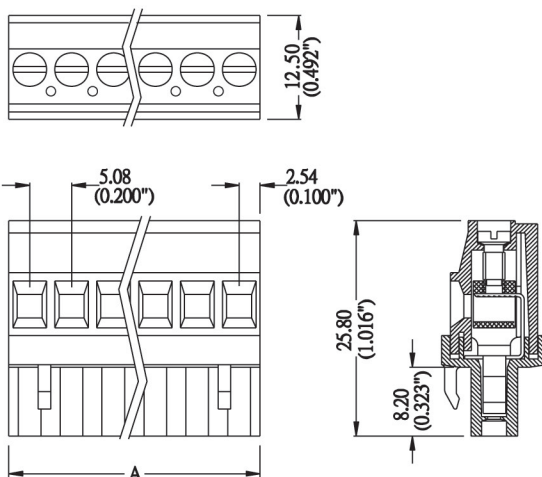

Pitch:5.08mm(0.200inch)

Item No.	Poles	A(mm)	A(inch)
MC200- 50802	2	10.16	0.400
MC200- 50803	3	15.24	0.600
MC200- 50804	4	20.32	0.800
MC200- 50805	5	25.40	1.000
MC200- 50806	6	30.48	1.200
MC200- 50807	7	35.56	1.400
MC200- 50808	8	40.64	1.600
MC200- 50809	9	45.72	1.800
MC200- 50810	10	50.80	2.000
MC200- 50811	11	55.88	2.200
MC200- 50812	12	60.96	2.400
MC200- 50824	24	121.96	4.800